

fit interiors ——— designed and produced in Italy

Frame

DESIGN FIRST.

fit interiors

Frame

LED backlit mirror with polished edges

- Light source container element in energy class C
- Electrical parts and led sources are not suitable in presence of sensors, including sensor of movement



Optional upon request

- Safety film available for minimal quantity
(ask the technical office to check)

Mirror



Silver

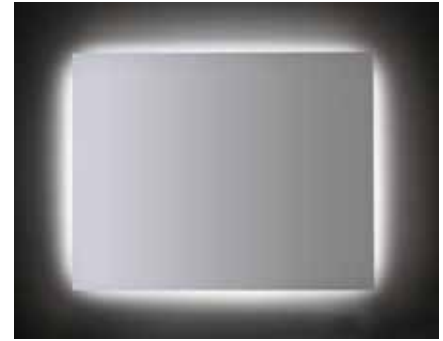


FRAME1

LED backlit mirror with polished edges

- gray pvc frame
- 4 mm thick mirror
- (N) 4000 K natural light
- LED strip, IP65
- 220/240Vac - 12 Vdc power supply, CE certified, IP44

Dimensions

W 600 mm / D 30 mm / H 600 mm




FRAME2

LED backlit mirror with polished edges

- gray pvc frame
- 4 mm thick mirror
- (N) 4000 K natural light
- LED strip, IP65
- 220/240Vac - 12 Vdc power supply, CE certified, IP44
- horizontal and vertical fixing

Dimensions

W 700 mm / D 30 mm / H 600 mm




FRAME3

LED backlit mirror with polished edges

- gray pvc frame
- 4 mm thick mirror
- (N) 4000 K natural light
- LED strip, IP65
- 220/240Vac - 12 Vdc power supply, CE certified, IP44
- horizontal and vertical fixing

Dimensions


W 900 mm / D 30 mm / H 600 mm

**FRAME60****LED backlit oval mirror with polished edges**

- internal frame in bordered polyurethane foam
- 4 mm thick mirror
- (N) 4000 K natural light
- LED strip, IP65
- 220/240Vac – 12 Vdc power supply, CE certified, IP44

Dimensions


ø 600 mm / D 30 mm

**FRAME75****LED backlit oval mirror with polished edges**

- internal frame in bordered polyurethane foam
- 4 mm thick mirror
- (N) 4000 K natural light
- LED strip, IP65
- 220/240Vac – 12 Vdc power supply, CE certified, IP44

Dimensions


ø 750 mm / D 30 mm

**FRAME90****LED backlit oval mirror with polished edges**

- internal frame in bordered polyurethane foam
- 4 mm thick mirror
- (N) 4000 K natural light
- LED strip, IP65
- 220/240Vac – 12 Vdc power supply, CE certified, IP44

Dimensions

ø 900 mm / D 30 mm

**FRAME5090****LED backlit oval mirror with polished edges**

- internal frame in bordered polyurethane foam
- 4 mm thick mirror
- (N) 4000 K natural light
- LED strip, IP65
- 220/240Vac – 12 Vdc power supply, CE certified, IP44

Dimensions

W 500 mm / D 30 mm / H 900 mm

follow us



**fit
interiors**

**furniture for gyms,
health and golf clubs,
spa&wellness, hotel,
medical and corporate**

visit www.fitinteriors.com